




STANDARD FITOUT

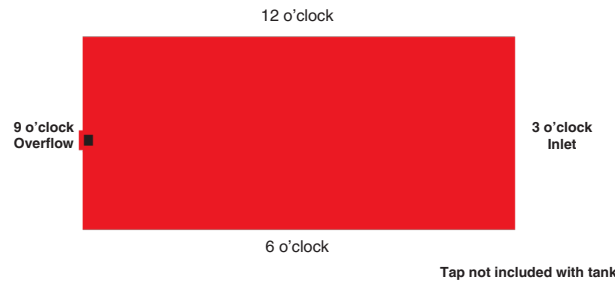

Dimensions:

Length	1400mm
Width/Diameter	820mm
Inlet Height	1730mm
Total Height	1800mm
Weight (approx.)	85kg

Tank is Supplied with:

1 x 200mm inlet strainer
1 x 90mm Overflow Cap
1 x 25mm (1") Flush Spinweld
1 x 25mm (1") Hex Nipple BSP
1 x 25mm (1") Brass Gate Valve

**Dimensions of our tanks can vary slightly due to shrinkage variations. All dimensions are approximate*

Standard Fit out Details:

Inlet	Centre - 300mm inlet strainer (no other location)
Overflow	@ 6 o'clock - 90mm overflow (moulded into tank)
Outlet	@ 12 o'clock - 25mm spinweld, hex nipple with 25mm brass gate valve

- When no fit out is nominated standard fit out will be supplied
- Bucket tap not included with tank
- Made in any standard COLORBOND® roofing colours

Other Fit out Options:

Inlet	Inlet is always at 3 o'clock and overflow at 9 o'clock
Outlet	@ 9 o'clock (left side of tank) - 25mm spinweld, hex nipple with 25mm brass gate valve

All Tankworld tanks are manufactured in Australia to the Australian Polyethylene tank standard using UV stabilised Polyethylene complying with AS/NZS 4020 and AS/NZS 2070.